



Articulated Dumper Range

Dumpers with a capacity of 1 to 10 tons. Robust, compact and durable

AUSA EUROPEAN MANUFACTURER

Robustness, safety and versatility

AUSA's dumper range is synonymous with **robustness, safety, efficiency and cost-effectiveness**. Our equipment stands out for its exceptional durability and ability to adapt to any surface. Regardless of the difficulty of the terrain or the space limitations, there is an AUSA dumper for each application and working environment (1000 kg to 10,000 kg).

At AUSA, we also work very hard to create designs that combine aesthetics and functionality. Our products provide the best performance and the highest levels of **safety, comfort, manoeuvrability, visibility, ergonomics, load capacity and resistance**. When combined, these concepts give you greater return on your investment.

Available with 4WD traction, hydrostatic transmission, torque converter (in high capacity models), hoppers with front, height and swivel unloading, as well as various adaptable accessories, **AUSA's dumper range provides a wide variety of transportation solutions.**



1. Headquarters 2. Assembly plant 3. Test, demonstration and training area 4. Warehouse for completed machines

ARTICULATED DUMPER RANGE



D 100 AHA
1000 kg



D 100 AHG
1000 kg



D 120 AHA
1200 kg



D 120 AHG
1200 kg

Pages 04-05



D 450 AHG
4500 kg

Pages 06-07



D 601 AHG
6000 kg

Pages 08-09



D 601 APG
6000 kg



D 150 AHA
1500 kg



D 150 AHG
1500 kg

Pages 04-05



D 300 AHG
3000 kg

Pages 06-07



D 350 AHG
3500 kg



D 1001 AP
10000 kg

Pages 10-11



D 1001 APG
10000 kg



DR 601 AHG
6000 kg

Pages 12-13



DR 1001 AHG
10000 kg

AUSA SERVICES

Our priority is the customer, which is why we provide a full range of solutions and services that undoubtedly contribute to improving your collaboration with AUSA.



FINANCING



TECHNICAL SUPPORT



MAINTENANCE



SPARE PARTS



TRAINING



WEBSITE FOR CUSTOMERS

A DISTRIBUTION NETWORK AT YOUR SERVICE

AUSA has a wide range of official distributors all over the world. Go to our website to find the one closest to you.

<https://www.ausa.com/>

D 100 - 120 - 150 A

Articulated dumper 1000 - 1200 - 1500 kg

Our smallest articulated dumpers line is characterised by its reduced dimensions, combining unparalleled manoeuvrability with a high load capacity, both in terms of volume and tonnage. All without renouncing the safety of the driver and his environment, as thanks to its design, a low centre of gravity is achieved.

Robust and efficient, all models feature 4WD hydrostatic transmission, articulated $\pm 35^\circ$, pendulum of $\pm 13^\circ$, reduced turning radius and capacity to work on steep gradients and uneven terrain.



• **ROPS foldable roll bar** to facilitate its transportation.

• **Spaciousness in the driver's seat** for comfortable and ergonomic handling that facilitates visibility and safety.

• **Protective structure** for the user.

• **Easy access** to internal components to reduce the time and cost of maintenance work.

• **The All-in-One-Hand joystick** provides better ergonomics, perfect control and faster movements.

• **Axles with epicyclic final reduction and sealed brakes** that provide greater traction capacity.

D 100 AHA COMPACT

D 100 AHA 

D 100 AHG 



Characteristics				
D 100 AHA Compact	1000	15,6	1000	H-4x4
D 100 AHA	1000	15,6	1100	H-4x4
D 100 AHG	1000	15,6	1100	H-4x4

Advantages

- Its reduced external dimensions make it the perfect option for working in small and narrow spaces. Compact option (width 1000 mm).
- With a high level of manoeuvrability, it can work and circulate easily in urban areas and buildings that are being renovated.
- Despite its small size, it has a maximum load of up to 1000 kg.

D 120 AHA

D 120 AHG 



Characteristics				
D 120 AHA	1200	15,6	1210	H-4x4
D 120 AHG	1200	15,6	1210	H-4x4

Advantages

- Its reduced external dimensions make it the perfect option for working in small and narrow spaces.
- With a high level of manoeuvrability, it can work and circulate easily in urban areas and buildings that are being renovated.
- Despite its small size, it has a maximum load of up to 1000 kg.

D 150 AHA

D 150 AHG 



Characteristics				
D 150 AHA	1500	15,6	1480	H-4x4
D 150 AHG	1500	15,6	1480	H-4x4

Advantages

- Extremely versatile product with an excellent ratio between load capacity (1500 kg) and power capacity (15.6 kW).
- It stands out for its ability to combine strength and robustness with very reduced dimensions, undoubtedly the best combination in its segment.
- Comfortable and ergonomic, it is easy to drive and has excellent manoeuvrability.

D 300 - 350 - 450 A

Articulated dumper 3000 - 3500 - 4500 kg

Versatile, powerful and with great off-road capability. The AUSA range of medium payload capacity dumpers stand out for their robust chassis and great driving comfort thanks to the hydrostatic transmission and exclusive articulation.

Their payloads, combined with powerful engines, allow them to tackle steep slopes while maintaining low fuel consumption.

They are undoubtedly the best alternative for work on any terrain, becoming a highly versatile and powerful product with a compact size.



• **Foldable ROPS roll bar** to facilitate their transportation, with gas shock absorbers to assist with folding and unfolding.

• **Spaciousness in the driver's seat** for comfortable and ergonomic handling, facilitating visibility and safety during use.

• **Full Visibility System** (optional): includes a camera and presence sensor system for greater safety.

• **Easy access** to internal components to reduce the time and cost of maintenance work.

• **The All-in-One-Hand joystick** provides better ergonomics, perfect control and faster movements.

• **Protective structure** for the user.

D 300 AHG



Characteristics				
D 300 AHG	3000	18,5	1840	H-4x4

Advantages

- Robust: uses the same chassis, transmission and engine cooling as the more advanced model, D450AHG.
- 4-cylinder engine with a torque of 92.6 Nm @ 1700 rpm.

D 350 AHG



Characteristics				
D 350 AHG	3500	32,8	1850	H-4x4

Advantages

- Powerful and robust, it is the most balanced option in terms of load capacity, volume and off-road capability.
- Ease of use, as well as a high level of comfort when driving.

D 450 AHG



Characteristics				
D 450 AHG	4500	32,8	1870	H-4x4

Advantages

- Particularly recommended for transporting large loads.
- It is the biggest dumper of this line and was specially designed for large-scale operations on all terrains.
- Reduced maintenance costs.

D 601 A

Articulated dumper 6000 Kg

Cost-effective, safe and high-tech. With an 180-degree swing skip and 6-ton payload, it has hydrostatic transmission for maximum comfort and safety.

With the D601AHG dumper, you will have an efficient and environmentally-friendly dumper. Equipped with the ECO Mode system as standard, which automatically regulates the machine's RPM at low speeds, and the optional Smart Stop feature, which switches off the engine when it is not in use, you will significantly improve fuel consumption, maintaining low CO2 emissions.

You will also have an exceptionally safe system. It features a new Hill Holder system, which automatically engages the brake when you take your foot off the accelerator at speeds close to zero mph. Imagine how easy it will be to manoeuvre on any slope!

• **ECO Mode** to automatically regulate the RPM to ensure low consumption and reduced maintenance costs.

• **Digital screen** with all of the information about the machine and self-diagnostics.

• **Smart Stop**, which switches off the machine's engine when it is not in use, to make it more cost-effective.



• **Easy access** to all internal components to reduce costs and facilitate maintenance.

• **The limited-slip differential** on both axles offer the best all-terrain traction available on the market.

• **Hill holder**, which keeps the machine stationary on any slope, without putting your foot on the brake.

D 601 AHG



Characteristics

				
D 601 AHG	6000	55,4	2210	H-4x4

Advantages

- Reduced fuel consumption and low emissions thanks to the ECO Mode and Smart Stop systems.
- The Hill Holder system provides a major boost to safety for the driver and the surrounding area.
- The powerful engine and the limited-slip differential on both axles provide high tractive force.

D 601 APG



Characteristics

				
D 601 APG	6000	55,4	2210	P-4x4

Advantages

- The transmission with a torque converter ensures the fast delivery of power and simple maintenance.
- Reduced fuel consumption and service hours thanks to the Smart Stop system.
- The powerful engine and the limited-slip differential on both axles provide high tractive force.

D 1001 A

Articulated dumper 10,000 kg

The highest payload capacity range is designed to tackle the biggest jobs. Thanks to their high level of power, limited-slip differential on both axles and 4x4 drive, they are unrivalled dumpers for transporting large amounts of earth on any type of surface.

The digital screen, located in the operator's position, offers all the information and warnings of the machine in real time and has a self-diagnosis system that facilitates and speeds up any need for technical support.

Furthermore, the standard front camera provides greater safety for the driver and the surrounding area, enabling a more relaxed and efficient driving experience.

• **Foldable ROPS roll bar** to facilitate their transportation, with gas shock absorbers to assist with folding and unfolding.

• **Digital screen** with all of the information about the machine and self-diagnostics.

• **Smart Stop**, which switches off the machine's engine when it is not in use, to make it more cost-effective.



• **The All in One Hand joystick** in the driver's seat provides better ergonomics, total control and increased precision in movements.

• **Spaciousness in the driver's seat** for comfortable and ergonomic handling, facilitating visibility and safety during use.

• **Front camera** to increase operating safety.

D 1001 AP

Available
2021



Characteristics				
D 1001 AP	10000	55,4	2420	P-4x4

Advantages

- Front-tip skip with a high payload.
- Elevated driving position for maximum visibility of the surrounding area.
- High-performance dumper for all types of work and terrain.

D 1001 APG



Characteristics				
D 1001 APG	10000	55,4	2410	P-4x4



Advantages

- Swing-tip skip designed to provide great visibility.
- Elevated driving position for maximum visibility of the surrounding area.
- Equipped with high-power engine sizes and excellent torque.

DR 601 - 1001 A

Reversible dumper 6000 - 10,000 kg

The DR601AHG and DR1001AHG comprise the most advanced range of reversible dumpers. The driving position can rotate 180 degrees easily, instantly adapting the driver's new position: steering wheel, joystick, pedals, cameras... The reversible function enables faster and safer operations than on a conventional dumper, so productivity is much higher.

The driver can also comfortably and safely get on and off both sides of the dumper, increasing the flexibility of all operations.



DR 601 AHG



Characteristics				
DR 601 AHG	6000	55,4	2210	H-4x4



Advantages

- 6,000 kg payload dumper with swing skip.
- Technologically advanced, with different systems to increase performance and safety.
- Powerful engine of 55.4 kW and 340 Nm @ 1500 rpm.
- Unmatched all-terrain capability with axles with limited-slip differential and hydrostatic drive.

DR 1001 AHG



Characteristics				
DR 1001 AHG	10000	55,4	2410	H-4x4



Advantages

- 10,000 kg payload dumper with swing skip and hydrostatic drive.
- Technologically advanced, with different systems to increase performance and safety.
- Powerful engine of 55.4 kW and 340 Nm @ 1500 rpm.
- Unmatched all-terrain capability with axles with limited-slip differential and hydrostatic drive.

TECHNICAL DATA

		D 100 AHA COMPACT	D 100 AHA
GENERAL		UNIT	
Unloading system	-	High	High
Load capacity	kg	1000	1000
Chassis	-	Articulated and oscillating	
Water hopper capacity	l	345	345
Level hopper capacity	l	395	395
Heaped hopper capacity	l	565	565
Empty weight	kg	1300	1300
Transmission	-	Hydrostatic	
ENGINE			
Brand	-	KUBOTA	
Model	-	D1105-E4B	
Power	kW	15,6	
Operating speed	rpm	2400	
Torque	N·m@rpm	71,4@1600	
No. of cylinders	-	3	
Emissions	-	Stage V, EPA Tier 4	
Noise	dB(A)	101	
DRIVING			
Max. speed	km/h	15	15
Maximum gradient	%	38	38
External turning radius	mm	3060	3060
Traction	-	4x4	4x4
Tyres	-	6.5/80-12	27x8.5-15
HYDRAULIC SYSTEM			
Hydraulic circuit	-	8 cc gear pump	
Flow rate	l/min	17,28	17,28
Working pressure	bar	180	180
TANK CAPACITY			
Fuel	l	23	23
Hydraulic system	l	21,2	21,2
BRAKES			
Service	-	Sealed brakes with multiple discs in oil. Mechanical drive	
Parking	-	Sealed brakes with multiple discs in oil. Mechanical drive	



FINANCE

Our aim is to provide high-quality finance services to help our customers to prosper. Therefore, in AUSA Finance we have the best finance solutions, tailored to you: personalized payment plans, leasing, renting, etc. In AUSA Finance we have a team of experts who will find the best finance solution to meet your business needs, making every step as simple as possible to ensure that you quickly have your new machine, ready for work.

	D 100 AHG	D 120 AHA	D 120 AHG
Unloading system	Rotating	High	Rotating
Load capacity	1000	1200	1200
Chassis	Articulated and oscillating		
Water hopper capacity	325	425	415
Level hopper capacity	390	515	495
Heaped hopper capacity	545	700	695
Empty weight	1300	1375	1375
Transmission	Hydrostatic		
ENGINE			
Brand	KUBOTA		
Model	D1105-E4B		
Power	15,6		
Operating speed	2400		
Torque	71,4@1600		
No. of cylinders	3		
Emissions	Stage V, EPA Tier 4		
Noise	101		
DRIVING			
Max. speed	15	17	17
Maximum gradient	38	48	48
External turning radius	3035	3125	3095
Traction	4x4	4x4	4x4
Tyres	27x8.5-15	10.0/75-15.3	10.0/75-15.3
HYDRAULIC SYSTEM			
Hydraulic circuit	8 cc gear pump		
Flow rate	17,28	17,28	17,28
Working pressure	180	180	180
TANK CAPACITY			
Fuel	23	23	23
Hydraulic system	21,2	21,2	21,2
BRAKES			
Service	Sealed brakes with multiple discs in oil. Mechanical drive		
Parking	Sealed brakes with multiple discs in oil. Mechanical drive		



TECHNICAL SUPPORT

We know that your machine should be running when you need it and with minimal operating costs. With a network of over 500 AUSA dealers across the world, we make sure that, if you have any unexpected problems, you always have someone nearby, ready to help.

Also, if you want, you can request a maintenance contract that best suits your intended use of your new equipment.

TECHNICAL DATA

		D 150 AHA	D 150 AHG
GENERAL		UNIT	
Unloading system	-	High	Rotating
Load capacity	kg	1500	1500
Chassis	-	Articulated and oscillating	
Water hopper capacity	l	605	520
Level hopper capacity	l	681	626
Heaped hopper capacity	l	841	900
Empty weight	kg	1510	1510
Transmission	-	Hydrostatic	
ENGINE			
Brand	-	KUBOTA	
Model	-	D1105-E4B	
Power	kW	15,6	
Operating speed	rpm	2400	
Torque	N·m@rpm	71,4@1600	
No. of cylinders	-	3	
Emissions	-	Stage V, EPA Tier 4	
Injection	-	-	
Exhaust aftertreatment	-	-	
Noise	dB(A)	101	
DRIVING			
Max. speed	km/h	14	14
Maximum gradient	%	40	40
External turning radius	mm	3260	3260
Traction	-	4x4	4x4
Tyres	-	10.0/75-15.3	10.0/75-15.3
HYDRAULIC SYSTEM			
Hydraulic circuit	-	8 cc gear pump	
Flow rate	l/min	17,28	17,28
Working pressure	bar	180	180
TANK CAPACITY			
Fuel	l	23	23
Hydraulic system	l	21,2	21,2
BRAKES			
Service	-	Sealed brakes. Hydraulic drive	
Parking	-	Sealed brakes. Mechanical drive	



WARRANTY

From the minute you purchase your AUSA machine, it is covered by a warranty for 12 months or 1,000 service hours, which we can offer thanks to our experience and industrial know-how spanning over 60 years.

And if you want, you can increase your peace of mind by extending the warranty to up to 3 years, so that the only thing that you have to worry about is the next job you are going to do with your AUSA machine.

	D 300 AHG	D 350 AHG	D 450 AHG
	Rotating	Rotating	Rotating
	3000	3500	4500
	Articulated and oscillating		
	720	1020	1370
	1330	1790	2055
	2097	2130	2670
	2701	2831	2970
	Hydrostatic		
	KUBOTA	KUBOTA	
	V1505-E4B	D1803-CR-T-E5B	
	18,5	32,8	
	2300	2400	
	92,5@1700	150,5@1500	
	4	3	
	Stage V, EPA Tier 4i	Stage V, EPA Tier 4f	
	Mechanical pump	Common Rail and electronic management	
	-	DPF (Diesel particulate filter)	
	101	101	
	17	19	22
	46	54	35
	4515	4515	4830
	4x4	4x4	4x4
	11.5/80-15.3	11.5/80-15.3	12.0/75-18
	12 cc gear pump		
	26,6	26,6	26,6
	170	170	200
	44	44	44
	40	40	40
	Sealed brakes. Hydraulic drive		
	Sealed brakes. Mechanical drive		



SPARE PARTS

Keep your AUSA equipment in perfect working order by only using original spare parts, as only they are the same as the top-quality components used to manufacture it. Installing other spare parts may prevent it from working properly and reduce its service life.

Always demand the installation of original spare parts to ensure the complete reliability and durability of your machine.

AUSA's official dealers make sure that original spare parts are available everywhere in the world.

TECHNICAL DATA

		D 601 AHG	D 601 APG
GENERAL		UNIT	
Unloading system	-	Rotating	Rotating
Load capacity	kg	6000	6000
Chassis	-	Articulated and oscillating	
Water hopper capacity	l	1665	1665
Level hopper capacity	l	2455	2455
Heaped hopper capacity	l	3154	3154
Empty weight	kg	4490	4696
Transmission	-	Hydrostatic	Torque converter
ENGINE			
Brand	-	DEUTZ	
Model	-	TD3.6 L4	
Power	kW	55,4	
Operating speed	rpm	2200	
Torque	N·m@rpm	340@1500	
No. of cylinders	-	4	
Emissions	-	Stage V, Tier 4f	
Injection	-	Common Rail and electronic management	
Exhaust aftertreatment	-	DPF (Diesel particulate filter)	
Noise	dB(A)	101	
DRIVING			
Max. speed	km/h	25	27,7
Maximum gradient	%	45	45
External turning radius	mm	5900	5900
Traction	-	4x4	4x4
Tyres	-	405/70-20	405/70-20
HYDRAULIC SYSTEM			
Hydraulic circuit	-	Double gear pump	
Flow rate	l/min	50	46
Working pressure	bar	180	180
TANK CAPACITY			
Fuel	l	69	69
Hydraulic system	l	60	60
BRAKES			
Service	-	Sealed brakes. Hydraulic drive	
Parking	-	Negative	



WARRANTY

From the minute you purchase your AUSA machine, it is covered by a warranty for 12 months or 1,000 service hours, which we can offer thanks to our experience and industrial know-how spanning over 60 years.

And if you want, you can increase your peace of mind by extending the warranty to up to 3 years, so that the only thing that you have to worry about is the next job you are going to do with your AUSA machine.

	DR 601 AHG	D 1001 AP	D 1001 APG	DR 1001 AHG
Unloading system	Rotating	Frontal	Rotating	Rotating
Load capacity	6000	10000	10000	10000
Chassis	-	Articulated and oscillating		
Water hopper capacity	1665	2270	1850	1850
Level hopper capacity	2455	3800	3300	3300
Heaped hopper capacity	3154	4240	3900	3900
Empty weight	4830	4910	5185	5050
Transmission	Hydrostatic	Torque converter		Hydrostatic
Brand	DEUTZ	DEUTZ		
Model	TD3.6 L4	TCD3.6 L4 HT		
Power	55,4	55,4		
Operating speed	2200	2200		
Torque	340@1500	405@1300		
No. of cylinders	4	4		
Emissions	Stage V, Tier 4f	Stage V		
Injection	Common Rail	Common Rail		
Exhaust aftertreatment	DPF (Diesel particulate filter)	DPF (Diesel particulate filter)		
Noise	101	100,6	100,6	101
Max. speed	25	25	25	22
Maximum gradient	45	45	45	45
External turning radius	5900	6287	6287	6287
Traction	4x4	4x4	4x4	4x4
Tyres	405/70-20	500/60-22.5	500/60-22.5	500/60-22.5
Hydraulic circuit	Double gear pump	Double gear pump		
Flow rate	50	46	46	50
Working pressure	180	180	180	180
Fuel	69	69	69	69
Hydraulic system	60	60	60	60
Service	-	Sealed brakes. Hydraulic drive		
Parking	-	Negative		



SPARE PARTS


Keep your AUSA equipment in perfect working order by only using original spare parts, as only they are the same as the top-quality components used to manufacture it. Installing other spare parts may prevent it from working properly and reduce its service life.

Always demand the installation of original spare parts to ensure the complete reliability and durability of your machine.


AUSA's official dealers make sure that original spare parts are available everywhere in the world.

DIMENSIONS


DR 601 AHG / DR 1001 AHG

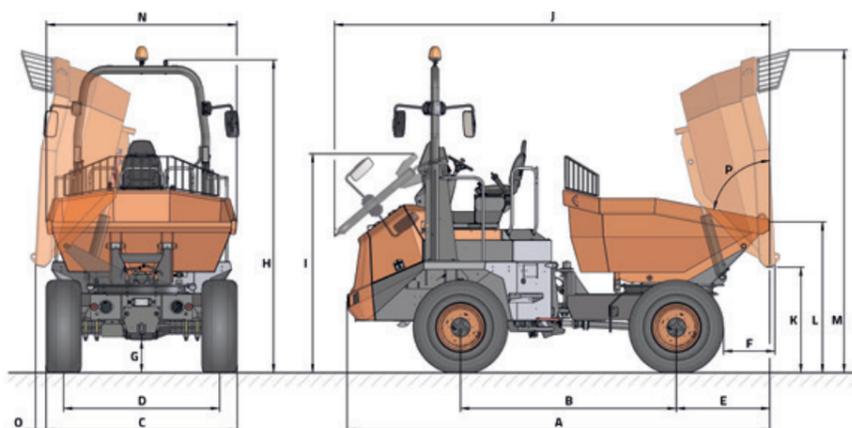


D 601 AHG / D 601 APG / D 1001 AP / D1001 APG

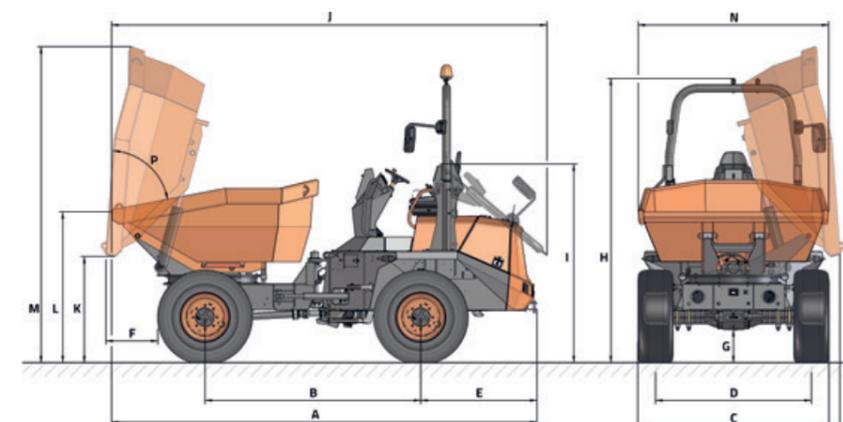


D 300 AHG / D 350 AHG / D 450 AHG

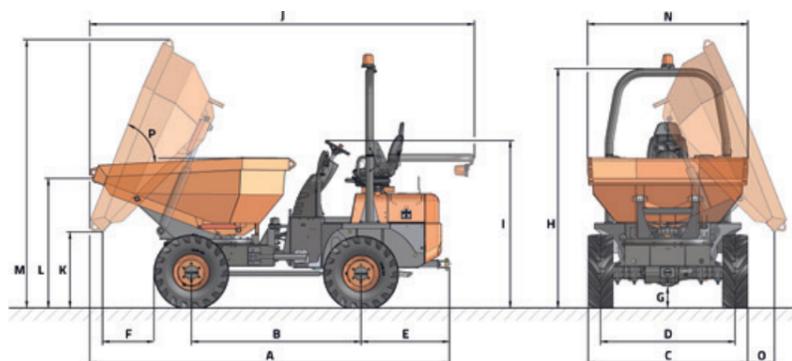

D 100 AHA / D 120 AHA / D 150 AHA

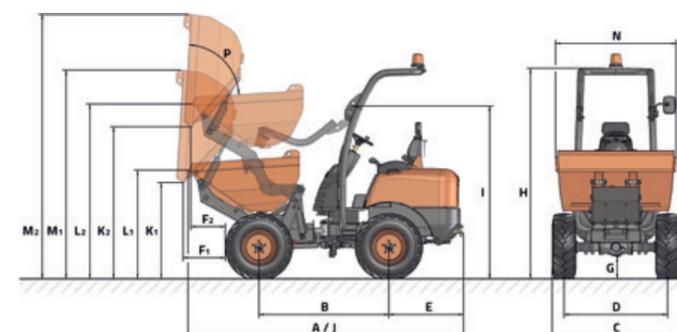

D 100 AHG / D 120 AHG / D 150 AHG

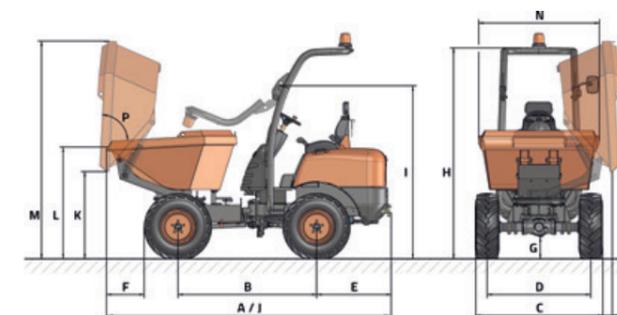

D 100 AHA COMPACT D 100 AHA D 100 AHG D 120 AHA D 120 AHG D 150 AHA D 150 AHG

DIMENSIONS (mm)	D 100 AHA COMPACT	D 100 AHA	D 100 AHG	D 120 AHA	D 120 AHG	D 150 AHA	D 150 AHG
A	3200	3200	3200	3200	3200	3200	3300
B	1500	1500	1500	1500	1500	1500	1600
C	980	1100	1100	1210	1210	1480	1480
D	815	865	865	925	925	1195	1195
E	860	860	860	860	860	860	860
F	545 505	500 460	500	460 420	460	460 420	460
G	170	210	210	250	250	250	250
H	2360	2400	2400	2440	2440	2440	2440
I	1920	1960	1960	2000	2000	2000	2000
J	3200	3200	3200	3200	3200	3200	3300
K	910 1670	950 1710	950	990 1750	1000	990 1750	1000
L	1180 1940	1230 1980	1230	1270 2020	1270	1270 2020	1290
M	2210 2970	2250 3010	2350	2300 3050	2400	2300 3050	2500
N	1000	1000	1000	1200	1200	1400	1400
O	-	-	310	-	260	-	135

DIMENSIONS (°)

P	83	83	83	83	83	83	83
---	----	----	----	----	----	----	----

1 ▲ | ▲ 2 1 ▲ | ▲ 2 1 ▲ | ▲ 2 1 ▲ | ▲ 2

D 300 AHG D 350 AHG D 450 AHG D 601 AHG D 601 APG DR 601 AHG D 1001 AP D 1001 APG DR 1001 AHG

4040	4170	4380	4910	4910	4910	4790	5020	5020
1960	1960	1960	2490	2490	2490	2690	2690	2690
1840	1840	1860	2210	2210	2210	2410	2410	2410
1555	1555	1555	1800	1800	1800	1920	1920	1920
1025	1025	1025	1340	1340	1080	1340	1340	990
525	600	775	580	580	580	485	485	485
260	260	310	380	380	380	410	410	410
2770	2770	2820	3280 (3110*)	3280 (3110*)	3610 (3350*)	3640 (3470*)	3640 (3470*)	3640 (3380*)
1940	1940	2100	2290	2290	2530	2560	2560	2560
4320	4450	4660	5030	5030	5030	4910	5140	5140
940	870	735	1220	1220	1220	270	1260	1260
1450	1490	1640	1740	1740	1740	1770	1820	1820
3090	3090	3190	3640	3640	3720	2520	3830	3940
1510	1850	1870	2200	2200	2200	2420	2330	2330
250	310	520	110	110	110	-	155	155
65	65	65	75	75	75	81	75	75

* With closed cab

EQUIPMENT

	D 100 AHA / AHG	D 120 AHA / AHG	D 150 AHA / AHG	D 300 AHG	D 350 AHG	D 450 AHG	D 601 AHG	D 601 APG	DR 601 AHG	D 1001 AP / APG	DR 1001 AHG
FRAME OF THE DRIVER'S CAB											
ROPS forward folding roll bar	●	●	●								
ROPS backward folding roll bar	○	○	○	●	●	●	●	●	●	●	●
FOPS overhead guard over ROPS folding roll bar	○	○	○								
FOPS/ROPS enclosed cab with heating							○	○	○	○	○
SAFETY											
Seat belt	●	●	●	●	●	●	●	●	●	●	●
Rotating beacon	●	●	●	●	●	●	●	●	●	●	●
Acoustic warning for reverse gear	●	●	●	●	●	●	●	●	●	●	●
Anti-vandal security system	●	●	●	●	●	●	●	●	●	●	●
Skip side full visibility camera				○	○	●	●	●	●	●	●
Counterweight side full visibility camera and proximity sensor system				○	○	○	○	○	○	○	○
Emergency stop	○	○	○	○	●	●	●	●	●	●	●
Reflective decals	○	○	○	○	○	○					
Decal plates 25 km/h	○	○	○	○	○	○					
LIGHTING AND DRIVING											
Certified light system	○	○	○	○	○	○	○	○	○	○	○
Rear-view mirror	●	●	●	●	●	●	●	●	●	●	●
Second rear-view mirror							○	○	○	○	○
COMFORT											
Adjustable ergonomic seat	●	●	●	●	●	●	●	●	●	●	●
Highly comfortable seat, fully adjustable	○	○	○								
All-in-one-hand joystick	●	●	●	●	●	●	●	●	●	●	●
ADVANCED EQUIPMENT											
Hydrostatic transmission	●	●	●	●	●	●	●	●	●	●	●
Limited-slip differential on both axes							●	●	●	●	●
ECO Mode system							●	●	●	●	●
Smart Stop system							○	○	○	○	○
Sealed brakes	●	●	●	●	●	●	●	●	●	●	●
Negative brake							●	●	●	●	●
ACCESSORIES											
Disabling back-up beeper	○	○	○	○	○	○	○	○	○	○	○
Metal engine cover	○	○	○								
Front mudguards				○	○	○					
Sealed case for holding manuals	○	○	○	○	○	○	○	○	○	○	○
Ball and tow hitch with power socket	○	○	○								
Rockinger-type hitch				○	○	○					
Rockinger-type hitch with power socket							○	○	○	○	○
Power socket for the trailer hitch				○	○	○	○	○	○	○	○
Water separator diesel filter					●	●					
Air filter with cyclone pre-filter				○	○	○					
Biodegradable hydraulic oil	○	○	○	○	○						
Turf tyres 400/70-20"							○	○			
Narrow tyres 11.5/80-15.3"				○							
SPARE PARTS											
Maintenance kit	○	○	○								
Standard spare wheel	○	○	○	○	○	○	○	○	○	○	○

● Standard ○ Optional



CERTIFIED LIGHT SYSTEM



ROPS BACKWARD FOLDING ROLL BAR



FOPS/ROPS ENCLOSED CAB WITH HEATING



ROPS BACKWARD FOLDING ROLL BAR (D 100 AHA)



FRONT VIEW CAMERA



FOPS/ROPS FOLDING OVERHEAD GUARD



MKCAT.AD.EU.EN01

AUSA
C/ Castelladral 1
08243 Manresa - Barcelona
SPAIN
Tel. +34 93 874 7311
ausa@ausa.com
www.ausa.com

AUSA Spain: +34 91 669 00 06 ausa.madrid@ausa.com
AUSA France: +33 (0) 4 68 54 38 97 - ausa.france@ausa.fr
AUSA U.K.: +44 (0)7703 60 9009 - ausa.uk@ausa.com
AUSA Central Europe: +49 2384 9415725 - info@ausa.de
AUSA U.S.: +1 (310) 426 2305 - ausa.us@ausa.com
AUSA CHINA: +86 10 8598 7386 - ausa.china@ausa.com



Distributor's stamp



www.ausa.com